



# FILM SPECIFICATIONS

## THICK GAUGE WHITE MATTE — Pouches & Rollstock

DESCRIPTION

This film is ideal for durable applications requiring oxygen/moisture barrier properties and puncture resistance.

White film will create a white package interior, and will also help yield vibrant colors in printed artwork.

Matte finish has low shine, and colors in printed artwork may be slightly muted.

**Evaluation and fitness-for-use is the sole responsibility of the customer.**

STRUCTURE

Composite: 4.9mil 3-layer laminated film


**Laminate (Exterior) Layer:** 1.3mil matte BOPP (Biaxially-Oriented Polypropylene)

**Print Surface Layer:** 48ga CT PET (Corona-Treated Polyethylene Terephthalate)

**Sealant (Interior) Layer:** 3.0mil white EVOH (Ethylene-Vinyl Alcohol Copolymer)

FEATURES

- Excellent puncture resistance with good oxygen/moisture barrier
- All materials comply with FDA direct food contact regulations (BOPP: 21 C.F.R. § 177.1520, PET: 21 C.F.R. § 177.1630, EVOH: 21 C.F.R. § 177.1360)
- PET is chemically stable and resistant to attack by oils, solvents, weak acids, and weak alkalis
- EVOH provides strong seal-to-self fusion with low activation temperature
- EVOH has slip additive for reduced friction on packaging equipment

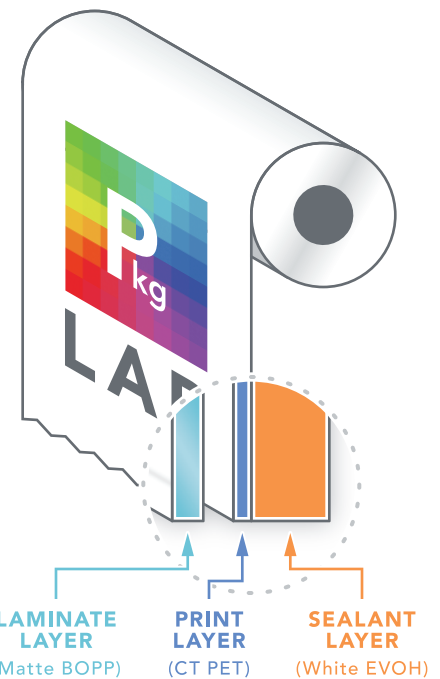

TYPICAL PROPERTIES

PROPERTY	TYPICAL VALUE	TESTING STANDARD(S)
Total Average Thickness (Composite)	4.9 mil	GB/T 6672 (Laminate layer) ASTM F2251 (Print + sealant layers)
Thickness Tolerance	±10 %	
Yield (Composite)	6,296 in <sup>2</sup> /lb	
COF (Coefficient of Friction)	≤0.4 (Laminate/exterior surface) 0.20–0.35 (Sealant/interior surface)	ASTM D1894
Haze (Laminate layer)	≥70 %	ASTM D1003
Gloss (45°, laminate layer)	≤8 %	GB/T 8807
Seal/Application Temperature (Sealant layer)	250–350 °F 120–180 °C	
Seal Strength (Self-to-self, sealant layer)	≥9 lb/in	ASTM F88
OTR (Oxygen Transmission Rate)	≤0.04 cm <sup>3</sup> /100 in <sup>2</sup> /24 hr	ASTM D3985
WVTR (Water Vapor Transmission Rate)	≤0.29 g/100 in <sup>2</sup> /24 hr	ASTM F1249
Film Shelf Life	12 mo from delivery	
Storage Temperature Range	50–80 °F 10–26 °C	
Storage Humidity Range	30–70 %	

The information provided here is believed to be correct to the best of our knowledge. This information is provided only as a guide, and does not express or imply any guarantees or warranty. It is your responsibility to evaluate the suitability of this material for your intended use prior to using this product. The Packaging Lab assumes no responsibility for the results of use of the products and processes described here. The Packaging Lab reserves the right to modify product properties or composition at any time without notice.